


IR ILLUMINATOR ENCLOSURE BRACKET

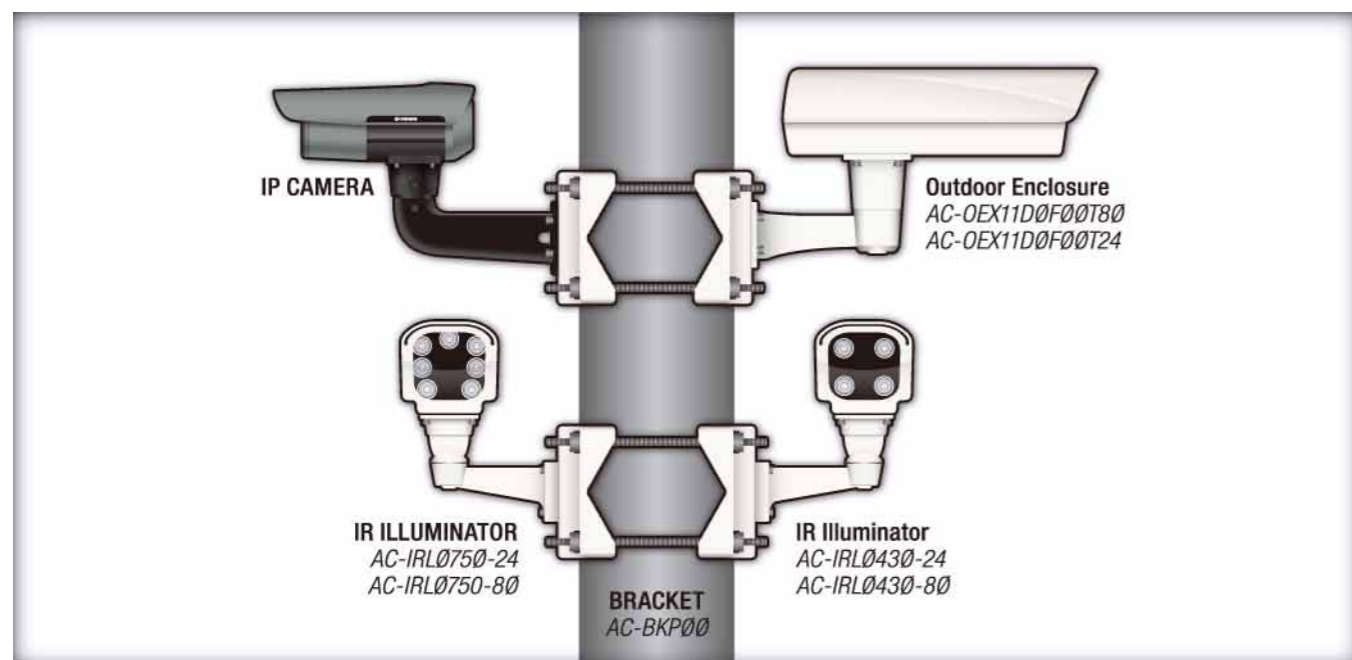

SPECIFICATIONS

IR ILLUMINATOR

Model	AC-IRL0430-24 AC-IRL0430-80	AC-IRL0750-24 AC-IRL0750-80	AC-IRLHP100-24 AC-IRLHP200-24
IR Range	25~30 m	40~50 m	AC-IRLHP100: 100 m AC-IRLHP200: 200 m
Number of IR LED	4	7	High Power LED
Bend Angel	25°	3 x 45° 4 x 25°	AC-IRLHP100: 60°~100° AC-IRLHP200: 20°~60°
Power Supply	AC-IRLXXX-24: 24 Vac AC-IRLXXX-80: 90~240 Vac	AC-IRLXXX-24: 24 Vac AC-IRLXXX-80: 90~240 Vac	12 Vdc, 24 Vac
Rating Current	1 A/Main Voltage 1.5 A/24 Vac	1 A/Main Voltage 1.5 A/24 Vac	2.3/4.6 A
Front Cover	Tempered Glass		
Operating Conditions	-20°C~50°C		-40°C~60°C
D/N Trigger I/O	2-wire Trigger Sync with Specific Etrovision IP Camera		N/A
Protection Level	IP44 with Ventilation Hole		IP68
Dimension	120 x 115 x 215 mm		233 x 310 x 220 mm

SPECIFICATIONS

BRACKET

Model	AC-BKD20	AC-BKL00	AC-BKCI817	AC-CI112
Type	Drop Ceiling Mount	Dome Type Wall Mount		Waterproof Conduit Box
Material	Plastic	Al-alloy	Aluminum	
Max. Load	3 Kg	5 kg	20 kg	10 kg
Dimension	170.5 (Ø) x 13.5 mm	165 x 150 x 111 mm	200 x 127 mm	168 x 134 x 99.5 mm
Weight	55 g	616 g	500 g	1276 g
Applied Models	N20 Series	N50, N51 Series	AC-CI112, N50, N51, N56, N57, N58 Series	AC-BKCI817, AC-BKM87, 71, N76 Series






Model	AC-BKP00	AC-BKT2VT9002	AC-BKT2VT9007	AC-BKT2VT9008
Type	Pole Mount		Exterior 90° Corner Bracket	Interior 90° Corner Bracket
Material	Die Cast Al-alloy	Steel		
Max. Load	30 kg	10 kg		
Dimension	277 x 75 x 168 mm	50 (Ø) x 314 (W) x 241 (H) mm	50 (Ø) x 324 (W) x 241 (H) mm	50 (Ø) x 200 (W) x 165 (H) mm
Weight	2400 g	1910 g	4290 g	2910 g
Applied Models	N71, N76 Series	N20, N21, N26 Series		

Model	AC-BKD20	AC-BKD21	AC-BKD22
Type	Pendant Mount		
Material	Aluminium		
Max. Load	5 kg		
Dimension	120 (Ø) x 295 mm	143 x 122 x 105.2 mm	55 x 55 x 172 mm
Weight	472 g	550 g	300 g
Applied Models	N20 Series	N21 Series	N22 Series

Model	AC-BKE00	AC-BKM00	AC-BKM87
Type	Wall Mount		
Material	Al-alloy		
Max. Load	10 kg	20 kg	5 kg
Dimension	248 x 41 mm	213 x 146 x 80 mm	213 x 100 x 70 mm
Weight	350 g	690 g	360 g
Applied Models	AC-OEX00000000N	AC-OEX0000F000N, AC-OEX11D0F000N	AC-CI112, N71, N76 Series

SPECIFICATIONS

ENCLOSURE

Model	AC-OEX0000000N	AC-OEX000D0F00N	AC-OEX11D0F00N	AC-OEX11D0F00T80	AC-OEX11D0F00T24
					
View Windows	Tempered Glass				
Casing	Aluminum		Die Casting Al-alloy		
Camera Mounting	Removable Sled			Bracket	
Heater	N/A		Built-in		
Heater on/off Control	N/A		15°C On 25°C Off		18°C On 28°C Off
Fan	N/A		Built-in		
Fan on/off Control	N/A		35°C On 25°C Off		35°C On 25°C Off
Operating Conditions	-10°C~50°C	-50°C~50°C		-30°C~50°C	
Power Supply	N/A	Yes 90~240 Vac Input		Yes 90~240 Vac Input	Yes 24 Vac Input
D/N Trigger I/O				2-wire Trigger Sync with Specific Etrovision IP Camera	
Dimension	377 x 115 x 147 mm	406 x 109 x 145 mm		200 x 115 x 110 mm	
Protection Level	IP66	IP68		IP66	
IR Illumination	N/A			50~80 Meter IR Range 11 x Super LED (5 x 45° + 6 x 25°)	
Available Bracket	AC-BKE00 Bracket Optional	AC-BKM00 Fully-cable-managed Bracket Optional		Fully-cable-managed Bracket Bundled	