EV6153A Series IP Camera

Progressive Scan CCD and H.264 Compression Format, Most Professional IP Surveillance Solution

H.264 | Audio | PoE | Wi-Fi | SD

Features

- 1/4" Progressive -scan CCD
- CS Mount Lens Changeable
- 0.5 Lux Minimum Illumination
- Image Control: Compression, Brightness, Contrast, Mirror
- Image Resolution: VGA, QVGA, QQVGA
- Up to 30fps at VGA Resolution
- Built-in High Sensitive MIC.
- Two-way Audio Support
- Built-in Sensitive Microphone
- Pre /Post Alarm to a SD Card
- H.264, MPEG-4, M-JPEG Dual Streams Simultaneously at D1 Resolution
- WiFi / PoE Support

Dimensions

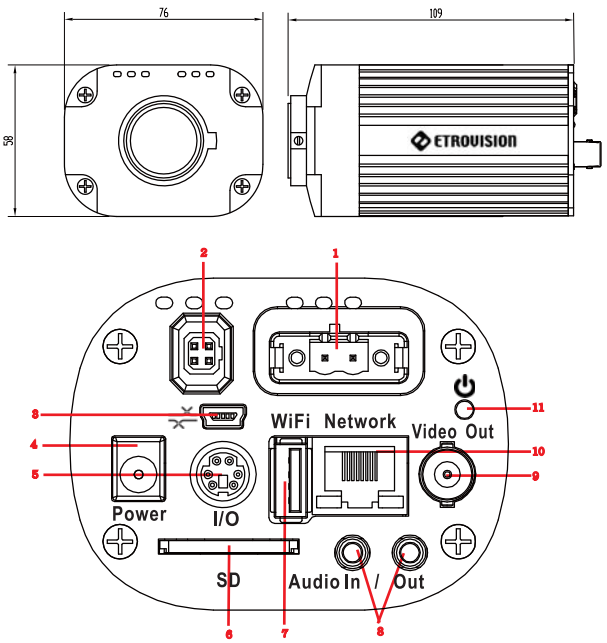

1. ICR Control (EV6150A-CI ONLY)
2. Auto Iris Control Adaptor
3. EtroLink™ USB Config Port
4. 12V DC Power
5. Mini-Din I/O Socket
6. SD Card Socket
7. USB Host for External Wi-Fi Support
8. Audio Line In / Audio Line Out
9. Video Out BNC Connector
10. RJ-45 Ethernet Port
11. Power LED

Specifications

	Model	EV6153A
Camera	Image Sensor	SONY 1/4" Progressive-Scanned CCD
	Lens	CS Mount Type, Lens Changeable
	Minimum Illumination	0.5 lux
	Shutter Time	1/30~1/50,000
	Number of Effective Pixels (HxV)	659 x 494
	Auto Iris	DC Drive
	Sync System	Internal
	Resolution	640 X 480 VGA
	S/N Ratio	48dB
Video / Audio	Video Compression	M-JPEG, MPEG-4,H.264 Format Selectable
	Resolutions	VGA (640X480), QVGA (320X240), QQVGA (160X120)
	Frame Rate	Up to 30fps @ VGA Resolution
	Video Streaming	Simultaneous Dual Stream Controllable Frame Rate and Bandwidth
	Image Settings	Compression, Brightness, Contrast, Exposure Control, Mirror
	Bit Rate	M-JPEG: 5 Video Quality Level Selectable; MPEG-4/H.264 : 64K~4Mbps
	Video Output	1CH NTSC/PAL, BNC Connector, 1.0Vp-p with 75 Ω Loading
	Audio	Audio In/Out : ADPCM
Network	Security	Password Protection, IP Address Filtering, User Access Privelge
	Supported Protocols	TCP/IP, DHCP, PPPoE, HTTP, DDNS, NTP, FTP, SMTP, UDP, RTP, RTSP, 3GPP, UPnP
System Integration & Maintenance	Application Programming Interface	EtroSDK™ 3.0
	Intelligent Video	Video Motion Detection
	Alarm Events	Intelligent Video, File Upload via FTP and E-mail, Notification via E-mail, External Output Activation, File Recording to Local SD Card
	Video Buffer	Pre-and Post Alarm Buffer up to 10-sec
	Configuration	EtroScan Utility
	Web Browser	Microsoft Internet Explorer 6.0, or Above
General	Casing	Metal (Aluminium)
	Dimension	76(W) X 64(H)X 100(D) mm
	Processor and Memory	512 MB or Above
	Power	12V DC / 1A
	Connectors	RJ-45 for 10BASE-T/100 BASE-TX,DC Jack ,EtroLink™, BNC, Iris Control Adaptor, Mini Din (DI/DO/RS485), USB A-Type Female , SD/SDHC Card Slot, Auido In, Audio Out
	CPU	Pentinum 4, 2.4GHz and Above
	Hard Disk	80 GB or Above
	Memory	512 MB or Above
	Operating System	Windows XP with SP2 or Above / Windows 2000 with SP4 or Above
	Video Resolution	SVGA or XGA with 1024x768 Resolution
	Software	DirectX 9.0C or Above
	Operating Conditions	0 ºC ~ 40 ºC (32 ºF ~ 104 ºF) 20% ~ 80% RH
	PoE(IEEE 802.3af)	Built-in
	Approvals	CE, FCC, RoHS
	Weight	330g
	Included Accessories	Power Adapter, USB Cable, CD-ROM (User Manual, Free Bundle NVR)

E-mail:etrosales@etrovision.com, TEL:+886-2-26551518
2F, Block C, Nan Kang Software Park,
19-5 San-chung Rd., Nan Kang District, Taipei 115, Taiwan

ETROVISION
www.etrovision.com

FC CE RoHS

Ver. 4.0 - 2010-03-04